IMAGERY DOOR AND WINDOW SYSTEM

PRODUCT CATALOGUE

IMAGERY TECHNOLOGY

BUILD A SUITABLE HOME TOGETHER

WhatsApp/WeChat/Tel：+8615753929999
Website：www.imagerywindows.com

Shandong Imagery Doors and Windows Technology Co.,Ltd.

IMAGERY TECHNOLOGY

ABOUT US

Shandong Imagery Doors and Windows Technology Co.,Ltd.

Shandong Imagery Doors and Windows Technology Co.,Ltd. has 6 complete production lines and design annual production capacity of over 200000 square meters,is one of the largest door and window manufacturers in northern China.Located in Linyi City,Shandong Province,so we have convenient transportation.


Our main categories: Aluminum door and window/shutter/sunroom/curtain wall /handrail/furniture etc.We can accept OEM and ODM.Mainly exported to North America,South America,Southeast Asia,Middle East,Europe,Central Asia,etc.

We have specialized designers,research and development team and technical teams who can provide you one-stop services with professional design solutions and comprehensive technical support. We have strict quality control system and safe packaging design,so you do not need to worry about the quality of the product and transportation.

2013
Business formation

20000 m^2
Production base

200000 m^2
Annual production capacity

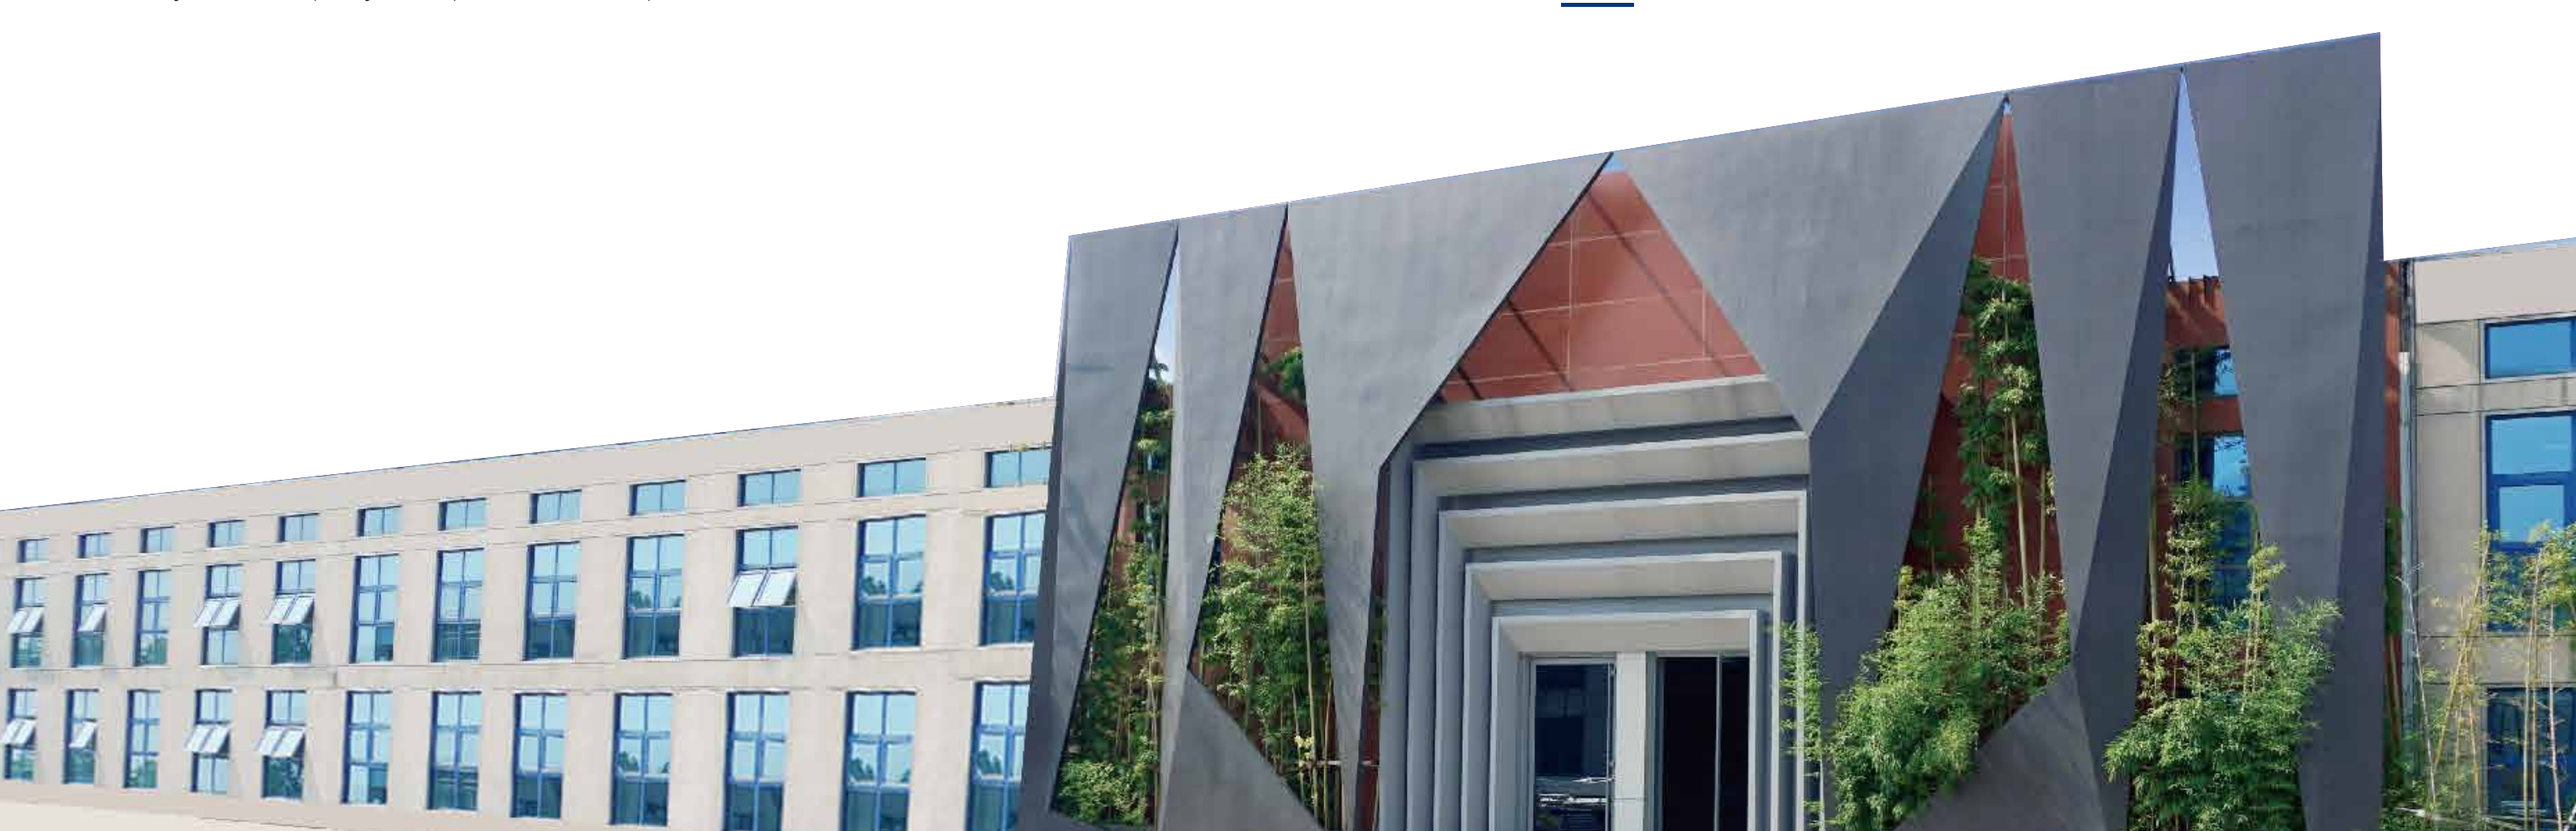

CORPORATE CULTURE

CORE VALUES

customer-centric,inclined towards hard-working individuals, continuous hard work, and persistent self-criticism.

Imagery spirit

Teamwork,honesty and trustworthiness,dedication to work, fearlessness of difficulties,embracing change,and pursuing escellence

Imagery style

React quickly and take immediate action.

Imagery management philosophy

Pursuing a more exciting work and life for all employees while contributing to the progress and development of the industry

COMPANY DEVELOPMENT PROCESS



2015-2020

Founded New Vision Door Window Systems division.
Expanded nationwide operations with record-breaking sales.
Upgraded services and embarked on a new growth journey.



2010-2015

Established Imagery System Windows R&D division.
Created metal furniture R&D department under Imagery Aluminum Technology.
Partnered with home decor brands to launch integrated window systems.



2005-2010

Introduced thermal break casement window series.
Released PVC (plastic-steel) window series.
Rolled out aluminum-wood composite windows.



2001-2005

Launched sliding window series.
Debuted Linyi’ s first aluminum alloy casement door window series.

HOT SELLING IN OVER
20 COUNTRIES ACROSS SIX CONTINENTS WORLDWIDE



WORLD DEVELOPMENT SCOPE

COMPAHY PATENT















COMPAHY QUALIFICATION








PRODUCT CASE DISPLAY

- Aluminum window and door system
- Sunroom system
- Curtain wall system
- Antique W&D System













PRODUCT CASE DISPLAY

- Aluminum window and door system
- Sunroom system
- Curtain wall system
- Antique W&D System









CATALOGUE


- 70 Casement doors and windows system ---- PAGE 02
- 7018 Minimalist casement doors and windows system ---- PAGE 04
- 8018 Casement doors and windows system ---- PAGE 06
- 8018P Minimalist casement doors and windows system ---- PAGE 08
- 8022 Casement door system ---- PAGE 10
- 9018 Minimalist casement doors and windows system ---- PAGE 12
- 1018 Casement doors and windows system ---- PAGE 14
- 1018 Energy-saving and quiet system ---- PAGE 16
- 1018P Minimalist casement doors and windows system ---- PAGE 18
- 80V Panorama system ---- PAGE 20
- 80VP Panorama system ---- PAGE 22
- 90VP Panorama system ---- PAGE 24
- 110P Minimalist casement doors and windows system ---- PAGE 26
- 1218 New windows system ---- PAGE 28
- Aluminum non-thermal broken casement windows and doors ---- PAGE 30
- 129+ Fully sealed sliding system ---- PAGE 32
- 150 Fully sealed sliding system ---- PAGE 34
- 150 Series panoramic sliding system ---- PAGE 36
- 156 Heavy lift-sliding system ---- PAGE 38
- Oversized folding doors system ---- PAGE 40
- Aluminum non-thermal broken sliding windows and doors ---- PAGE 42
- Drifting window system ---- PAGE 44
- American handcrank window system ---- PAGE 46
- Curtain wall parallel opening windows system ---- PAGE 48
- Double flying wings doors and windows system/stable doors ---- PAGE 50
- Barrier-free casement doors system ---- PAGE 52
- Extremely narrow frame casement doors system ---- PAGE 54
- Extremely narrow sliding doors system ---- PAGE 56
- 90 Micro ventilation system ---- PAGE 58
- 82 New Chinese doors and windows system ---- PAGE 60
- 88 Aluminum clad wood system ---- PAGE 62
- 168 intelligent lifting window system ---- PAGE 64
- Aluminum electric built-in blinds windows ---- PAGE 66
- Aluminum alloy fixed skylight ---- PAGE 68
- Electric skylight ---- PAGE 70
- Automatic remote control electric windows system ---- PAGE 72
- Aluminum electric rolling shutter ---- PAGE 74
- Electrically operated flip-top pavilion ---- PAGE 76
- Aluminum alloy glass partition ---- PAGE 78
- Aluminum railing/handrail/guardrail balustrade ---- PAGE 80
- Aluminium alloy glass railing ---- PAGE 82
- Aluminum louver ---- PAGE 84
- Aluminum glass jalousie windows ---- PAGE 86
- Sunroom system ---- PAGE 88
- Aluminum wood sunroom system ---- PAGE 90
- Wooden cable curtain wall system ---- PAGE 92
- Screen window ---- PAGE 94

Doors and Windows / Curtain wall / Sunroom / Metal furniture



70 CASEMENT DOORS AND WINDOWS SYSTEM

Product Section Details

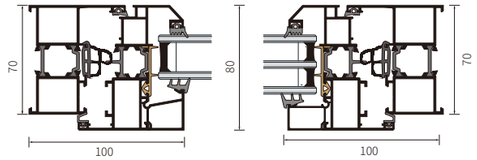



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★☆ ★☆☆	★★★★ ★★★★☆	★★☆ ★★☆	★★★★☆ ★★★☆☆

Product characteristics


- Window sash, window frame, center support glue, center pin connection
- Standard glass, three glass two chamber 5+12A+5+12A+5 two glass , one chamber:5+19A+5
- Can do circular window, arc window
- Aluminum alloy drain hole cover
- Flexible foam isobaric adhesive strip
- Hardware optional German HOPPE, domestic KINLONG

Video explanation

Doors and Windows / Curtain wall / Sunroom / Metal furniture

7018 MINIMALIST CASEMENT DOORS AND WINDOWS SYSTEM

Product Section Details

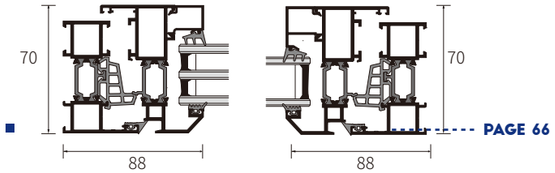

PAGE 66

China national standard GB/ T39529-2020 profile wall thickness 1.8mm



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★☆ ★☆☆	★★★★ ★★★★☆	★★☆ ★★☆	★★★★☆ ★★★☆☆


Product characteristics

- Profile thickness 1.8mm
- Optional and exclusive custom sculpting handle
- Three sealing strip design, insulation performance is more excellent
- Floor drain drainage system for doors and windows escort
- Balcony window customized solution, The view is reflected in the living room, making the home more comfortable



8018 CASEMENT DOORS AND WINDOWS SYSTEM

Product Section Details

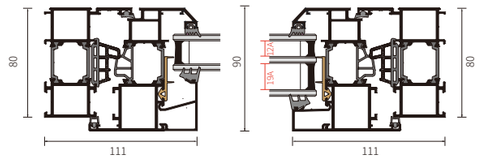

China national standard GB/ T39529-2020 profile wall thickness 1.8mm



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★★	★★★ ★★☆	★★★★ ★★★★★	★★☆ ★★☆	★★★★☆ ★★★★☆

Product characteristics


- Profile thickness 1.8mm
- Three glass two difference insulating glass standard 5+12A+5+19A+5,,K value is lower, two glass , one chamber:5+19A+5
- Flexible foam isobaric adhesive strip
- Can do circular window, arc window
- Patented soundproof tape
- Patented floor drain drainage system

Video explanation



8018P MINIMALIST CASEMENT DOORS AND WINDOWS SYSTEM

Product Section Details

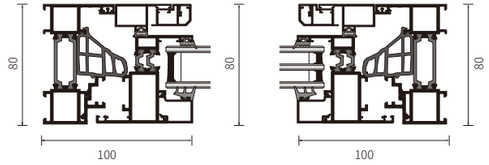

China national standard GB/ T39529-2020 profile wall thickness 1.8mm




Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★★	★★★	★★★★★	★★☆	★★★★☆
	★★☆	★★★★★★	★★☆	★★★★☆


Product characteristics

- Profile thickness 1.8mm
- Frame fan flush, double inner opening, detachable diamond mesh
- Hidden hinge, optional custom engraving handle
- Three sealing strip design, insulation performance is more excellent
- Floor drain drainage system for doors and windows escort
- Balcony window customized solution, The view is reflected in the living room, making the home more comfortable

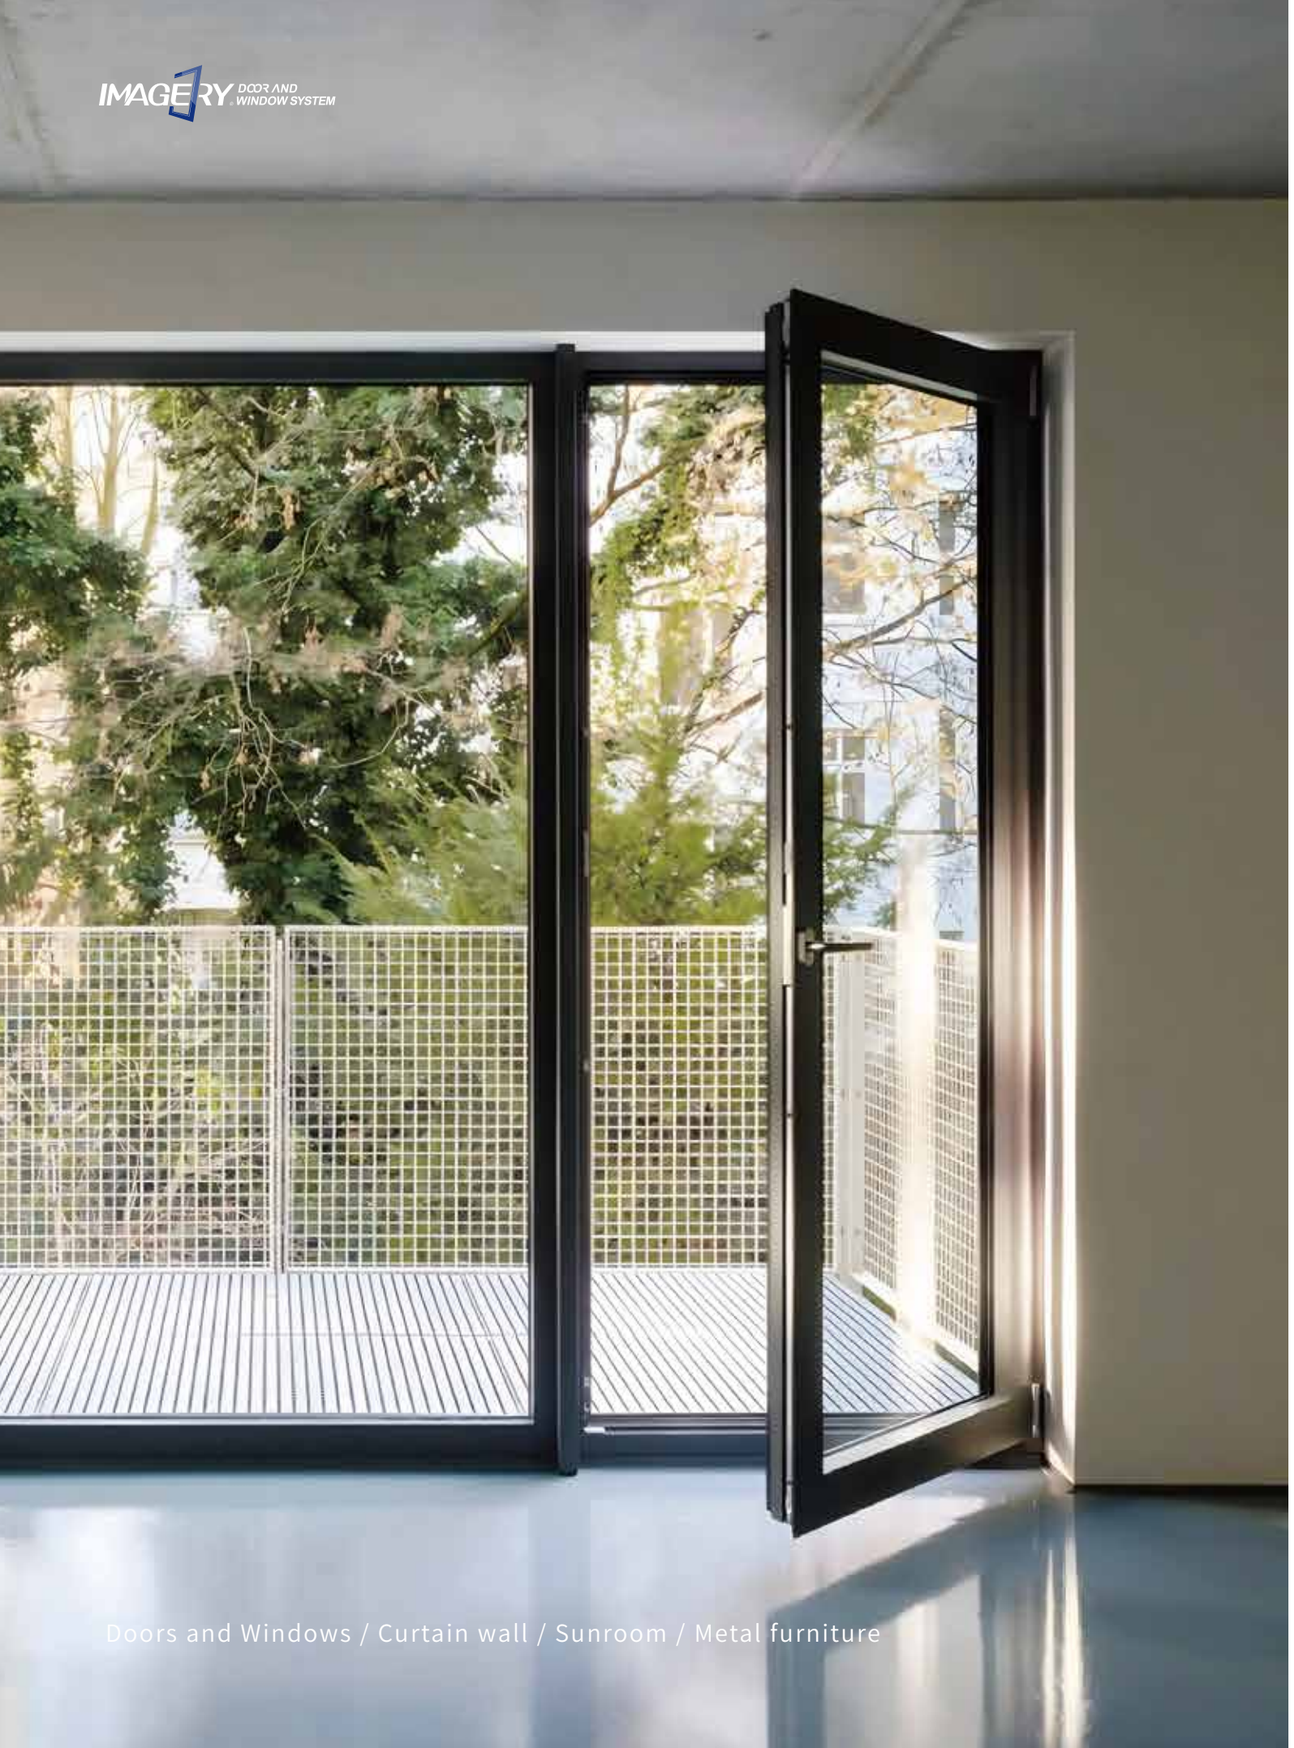

8022 CASEMENT DOOR SYSTEM

Product Section Details





Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics


- Profile wall thickness: 2.2mm
- Three elass two difference insulating glass standard 5+12A+5+19A+5
- Support hidden hinges
- Three sealing strips to optimize insulation performance
- Floor drain drainage system
- Threshold options: Flush, low-rise, or full-height (ground-level)

Video explanation



9018 MINIMALIST CASEMENT DOORS AND WINDOWS SYSTEM

Product Section Details

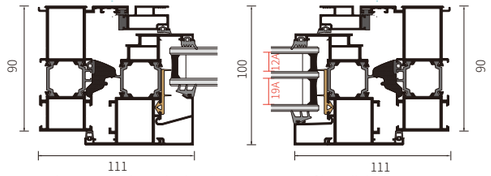

China national standard GB/ T39529-2020 profile wall thickness 1.8mm



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★★★	★★★ ★★☆	★★★★ ★★★★★★	★★☆ ★★☆	★★★★☆ ★★★★☆

Product characteristics


- Profile thickness 1.8mm
- Three glass two difference insulating glass standard 5+12A+5+19A+5, K value is lower, two glass , one chamber:5+19A+5,
- Integral bending EPDM foam isobaric adhesive strip
- Open removable diamond net
- Patented soundproof tape
- Patented floor drain drainage system

Video explanation



1018 CASEMENT DOORS AND WINDOWS SYSTEM

Product Section Details

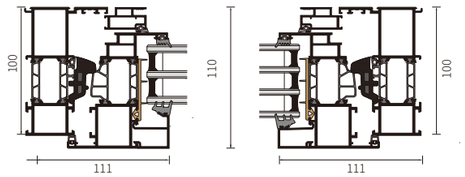

China national standard GB/ T39529-2020 profile wall thickness 1.8mm



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★★	★★★ ★★☆	★★★★ ★★★★★	★★★ ★★☆	★★★★☆ ★★★★☆

Product characteristics


- ◎ Profile thickness 1.8mm
- ◎ Four-glass three-cavity glass comes standard with 5+12A+5+12A+5+12A+5, with a lower K value, three glass, two chambers：5+12A+5+12A+5
- ◎ Integral bending EPDM foam isobaric adhesive strip
- ◎ Open removable diamond net
- ◎ Patented soundproof tape
- ◎ Patented floor drain drainage system

Video explanation



1018 ENERGY-SAVING AND QUIET SYSTEM

Product Section Details

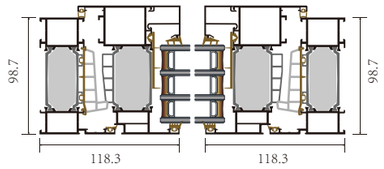



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★★	★★★ ★★☆	★★★★ ★★★★★	★★★ ★★☆	★★★★☆ ★★★★☆

Product characteristics


- New national standard 1.8mm profile
- Four glass three cavity, standard glass 5+16+5+16+5+14+5
- Integral bending EPDM foam isobaric adhesive strip
- 110mm sash thickness
- Patented soundproof tape
- Patented floor drain drainage system

Video explanation



1018P MINIMALIST CASEMENT DOORS AND WINDOWS SYSTEM

Product Section Details

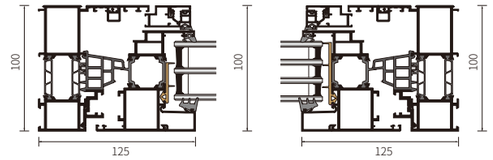

China national standard GB/ T39529-2020 profile wall thickness 1.8mm



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★★	★★★☆	★★★★★	★★★☆	★★★★☆

Product characteristics

- Profile thickness 1.8mm
- Frame fan flush, double inner opening, detachable diamond mesh
- Hidden hinge, optional custom engraving handle
- Three sealing strip design, insulation performance is more excellent
- Floor drain drainage system for doors and windows escort
- Balcony window customized solution, The view is reflected in the living room, making the home more comfortable


Video explanation

IMAGERY DOOR AND WINDOW SYSTEM



80V PANORAMA SYSTEM

Product Section Details

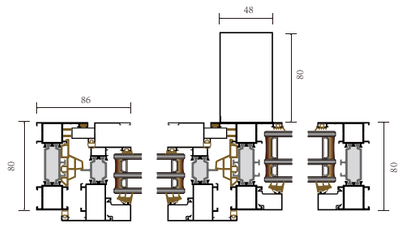



Product performance


Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★★	★★★ ★★☆	★★★★ ★★★★★	★★★ ★★☆	★★★★☆ ★★★★☆

Product characteristics

- Sash, frame and mullion injected with adhesive; mullion connected via pins
- Triple-pane double-cavity insulated glass configuration
- Integrated foamed equal-pressure gasket
- Patented floor drain drainage system
- 80 reinforced mullion design, compatible with steel tube reinforcement

80VP PANORAMA SYSTEM

Product Section Details

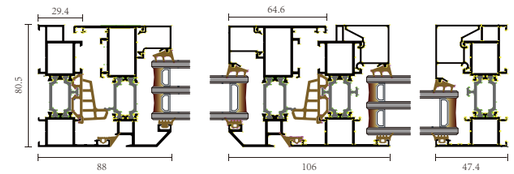



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★★	★★★☆	★★★★★★	★★★☆	★★★★☆


Product characteristics

- New national standard, wall thickness 1.8mm
- Optional hardware: Siegenia / imported Hoppe
- Three sealing strip design, insulation performance is more excellent
- Floor drain drainage system for doors and Windows escort
- JINXIANG Aluminum Profiles, coated with AkzoNobel powder via Italian vertical spraying line
- Flush frame and sash, tilt and turn



90VP PANORAMA SYSTEM

Product Section Details

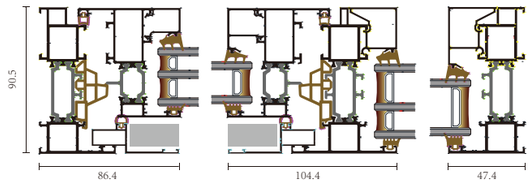



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★★	★★★ ★★☆	★★★★ ★★★★★★	★★★ ★★☆	★★★★☆ ★★★★☆

Product characteristics


- Sash, frame and mullion injected with adhesive; mullion connected via pins
- Triple-pane double-cavity insulated glass configuration
- Integrated foamed equal-pressure gasket

  Patented floor drain drainage system
- 90 reinforced mullion design, compatible with steel tube reinforcement
- JINXIANG Aluminum Profiles, coated with AkzoNobel powder via Italian vertical spraying line
- Flush frame and sash, dual inward opening, removable security diamond mesh



110P MINIMALIST CASEMENT DOORS AND WINDOWS SYSTEM

Product Section Details

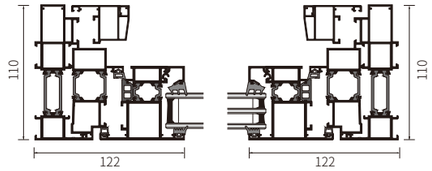

China national standard GB/ T39529-2020 profile wall thickness 1.8mm



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★☆ ★☆☆	★★★★ ★★★★☆	★★☆ ★★☆	★★★★☆ ★★★☆☆

Product characteristics


- Profile thickness 1.8mm
- The inner and outer frames are flush with each other and the window screen is integrated.
- Three glass, two chambers：5+12A+5+12A+5
  Two glass , one chamber:5+19A+5
- Floor drain drainage system
- SIEGENIA drive, with custom baseless handle
- Minimalist design optimizes visibility

Video explanation



1218 NEW WINDOWS SYSTEM

Product Section Details

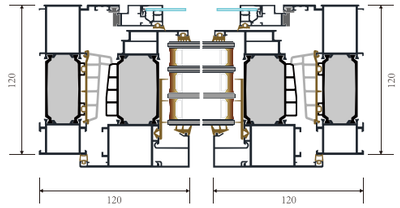



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★★	★★★ ★★☆	★★★★ ★★★★★	★★★ ★★☆	★★★★☆ ★★★★☆

Product characteristics

- Profile thickness1.8mm
- Four glass three cavity, standard glass 5+16+5+16+5+12+5
- Integral bending EPDM foam isobaric adhesive strip
- Open inward and removable Stainless steel mesh
- Brand patented soundproof tape
- Brand patented floor drain drainage system


Video explanation



ALUMINUM NON-THERMAL BROKEN CASEMENT WINDOWS AND DOORS

Glass configuration

5mm 5+9A+5

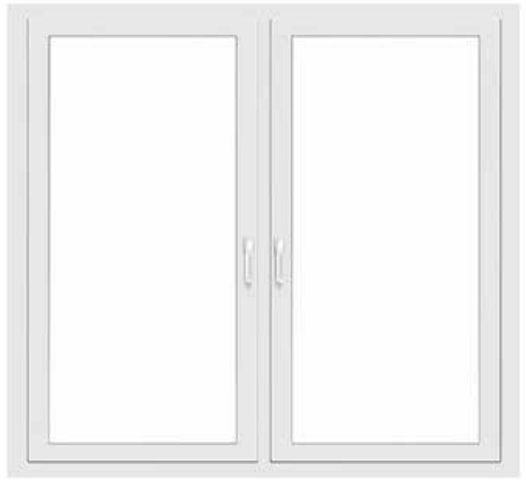

Recommended scenario

Tropical balcony, bedroom, toilet

Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★☆ ★★★☆	★★☆ ★★☆	★★☆☆ ★★☆☆☆	★★☆ ★☆☆	★★☆☆☆ ★★☆☆☆

Product characteristics


- Profile: 6063-T5 aluminum alloy non-broken bridge profile
- Can be matched with single layer or hollow tempered glass; 5mm/5+9A+5 hollow tempered glass
- With domestic or imported hardware accessories, it can be opened inside, open inside, open inside, open outside and hang outside
- It can be matched with invisible telescopic mesh, stainless steel diamond mesh, fixed window screen, etc
- Advantages: Excellent airtight and watertight performance; convenient and smooth opening; high cost performance

Video explanation



129+ FULLY SEALED SLIDING SYSTEM

Product Section Details

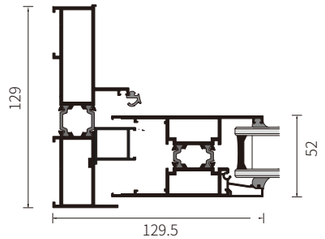



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★☆ ★★☆	★★★★ ★★★★★	★★★ ★★☆	★★★☆☆ ★★★☆☆

Product characteristics


- Profile: Fully sealed special profile wall thickness 2.0mm
- Hardware anti-theft system: a full set of imported German ROTO lnowa hidden hardware drive system + displacement locking pulley 4 large size anti-skid hook lock block + 10 lock points around the top and bottom (can be customized to increase to 12)
- Pulley system: upper guide wheel + sliding wheel, pulley lateral displacement embedded in the cassette to achieve upper and lower seal locking
- Sealing system: Open the encircling uninterrupted sealing strip, and the locking stroke of the fan transverse embedding frame body is 8mm

Video explanation



150 FULLY SEALED SLIDING SYSTEM

Product Section Details

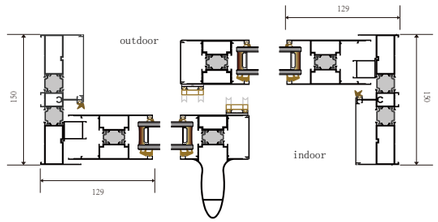



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★☆ ★★☆	★★★★★ ★★★★☆	★★★ ★★☆	★★★☆☆ ★★★☆☆

Product characteristics


- Customized profile for fully sealed sliding system, wall thickness 2.0 mm
- Hardware anti-theft system: The set of hardware imported from Germany Roto totally
- Hidden hardware drive system+displacement locking system
- 4 large size anti-skid hook lock blocks+10 lock points around the top and bottom(can be customized up to 12)
- Pulley system:Upper guide wheel+down pulley, move the pulley into the cassette in transverse position, realizes the upper and lower sealing and locking
- Sealing system: Wraparound continuous seal, 8mm parallel removable stroke
- he two doors can be opened separately, meet the use requirements of different space scenarios

Video explanation



150 SERIES PANORAMIC SLIDING SYSTEM

Product Section Details

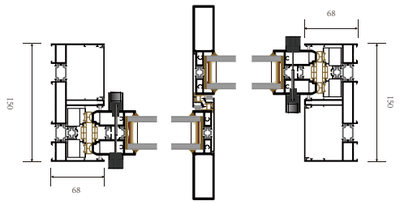



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★☆ ★★☆	★★★★ ★★★★★	★★★ ★★☆	★★★☆☆ ★★★☆☆


Product characteristics

- The thickness of the main material is 2.0mm, can be made with a super-large opening
- Yuhe brand customized hardware, the maximum load-bearing capacity is 450 kg
- The maximum available glass configuration is 5+12+5
- The four-sided frames need to be pre-embedded to achieve the best panoramic effect

Video explanation

156 HEAVY LIFT-SLIDING SYSTEM

Product Section Details

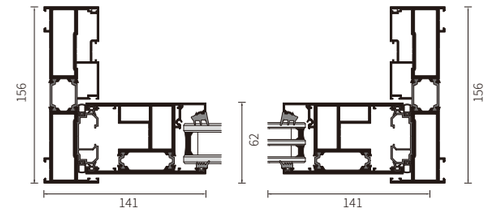



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★☆ ★★☆	★★★★ ★★★★★	★★★ ★★☆	★★★☆☆ ★★★☆☆

Product characteristics


- Main material wall thickness 3.5mm, can do large opening
- Imported heavy lifting hardware system, can be opened freely
- Frame-wrapped cavity structure, better sealing performance
- A variety of glass configurations can meet a variety of scenarios

Video explanation



OVERSIZED FOLDING DOORS SYSTEM

Product Section Details

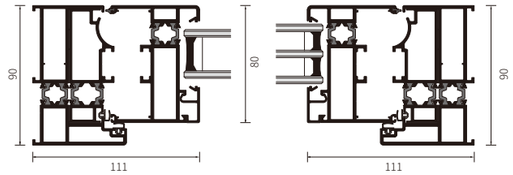



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★☆ ★★☆	★★★★ ★★★★★	★★☆ ★★★	★★★☆☆ ★★★☆☆

Product characteristics

- Custom accessories for folding doors
- The glass comes standard with 5+12A+5+12A+5
- Haida custom special EPDM automotive grade rubber strip
- Multiple opening combinations to meet different spatial applications

Video explanation

Doors and Windows / Curtain wall / Sunroom / Metal furniture

ALUMINUM NON-THERMAL BROKEN SLIDING WINDOWS AND DOORS

Glass configuration

5MM Single clear tempered glass
5MM+9A+5MM Double clear tempered glass

Recommended scenario

Tropical balcony, stairwell, kitchen, toilet

Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★☆ ★★☆☆	★★☆ ★★☆	★★☆☆ ★★☆☆☆	★☆☆ ★☆☆	★★☆☆☆ ★☆☆☆☆




Product characteristics

- Profile: 6063-T5 aluminum alloy non-broken bridge profile
- Can be matched with single layer or hollow tempered glass; 5mm/5+9A+5 hollow tempered glass
- With domestic or imported hardware accessories, such as: handle lock, bar lock, crescent lock
- It can be matched with push-pull gauze mesh, stainless steel diamond mesh, folded glass fiber mesh, and folded aluminum mesh screen window
- Advantages: does not occupy indoor space; convenient and smooth opening; high cost performance



DRIFTING WINDOW SYSTEM

Product Section Details

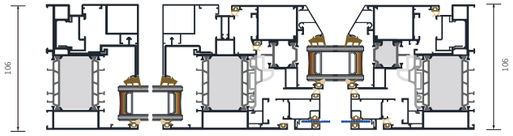



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★★ ☆☆☆	★★★★☆ ★★★★☆	★★☆ ★★☆	★★★★☆ ★★★☆☆

Product characteristics


- Profile thickness 1.8mm
- 50% open area, can be used as door style window, meet the needs of different spaces
- Glass standard 5+19A+5
- EPDM isobaric foam strip, excellent weather resistance and aging resistance
- Inward opening detachable stainless steel mesh fly screen
- OPK special sliding and tilt drift hardware system

Video explanation



AMERICAN HANDCRANK WINDOW SYSTEM

Product Section Details

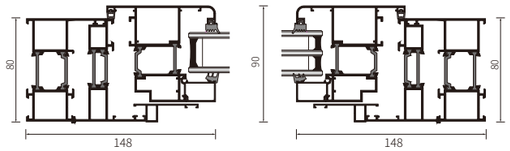



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★★★★☆	★★☆☆☆☆	★★★★★★★★☆☆	★★☆☆☆☆	★★★★★★★☆☆☆

Product characteristics


- Ergonomic design, hand-operated opening is easy and convenient to use
- Scientific design, windproof, drainage
- Removable diamond mesh, easy to clean
- Security and anti-theft, anti-theft level RC2
- The special position of the functional area is customized, and the opening position of the window sash can be up or down, which is not limited by the height, and the indoor ventilation is convenient
- German imported hardware

Video explanation



CURTAIN WALL PARALLEL OPENING WINDOWS SYSTEM

Product Section Details

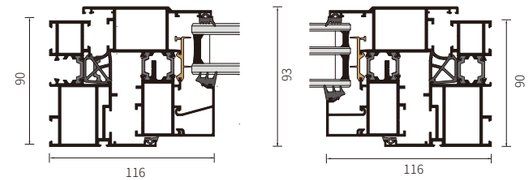



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★☆ ★★☆	★★★★ ★★★★★	★★☆ ★★☆	★★★★☆ ★★★★☆


Product characteristics

- Standard 6033T-5 original ecological aluminum alloy aluminum
- KINLONG upgraded high precision flat push handle, AF electric
- Glass configuration 5+12A+5+12A+5
- Haida customized special EPDM rubber strip
- Heavy duty flat push relative chain

Video explanation

DOUBLE FLYING WINGS DOORS AND WINDOWS SYSTEM/STABLE DOORS

Product Section Details

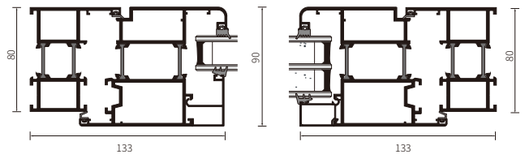



Opening mode



Product characteristics


- Multi-function opening, door and window switch automatically
- Aluminum alloy window frame glue, aluminum alloy window sash glue
- Special waterproof seal for frame and stick
- Patented soundproof leather strip to form multi-chamber heat insulation and noise reduction

Video explanation



BARRIER-FREE CASEMENT DOORS SYSTEM

Product Section Details

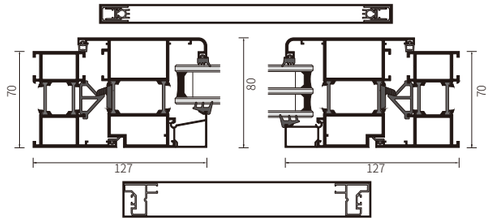

Detail presentation







Product characteristics


- It can be perfectly integrated with other product systems
- Automatic lifting seal design, the watertightness of the high threshold structure can reach 700pa, which is a good solution to the watertightness of the external door
- The unique lock point lock seat design complies with the EU WK2 safety rating
- Integrated design, hardware and profiles to achieve high precision, the design can reach 120,000 times of repeated opening (national standard 100,000 times), in line with more than 30 years of service life


Video explanation



EXTREMELY NARROW FRAME CASEMENT DOORS SYSTEM

Product Section Details

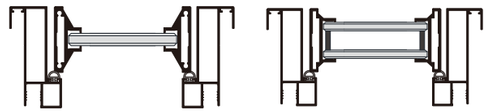

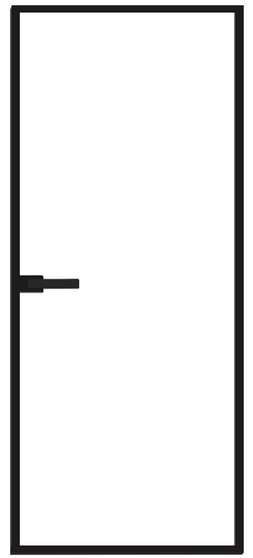

Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics


- Extremely narrow frame, visible surface is only 16mm, landing transparent, the ultimate vision
- Standard 6mm tempered glass, safe and secure
- Special profile, 2.0mm wall thickness, stable and firm
- Special matching handle, parallel to the border, beautiful and practical
- Classic elegant black, all-match fashion


Video explanation



EXTREMELY NARROW SLIDING DOORS SYSTEM

Product Section Details

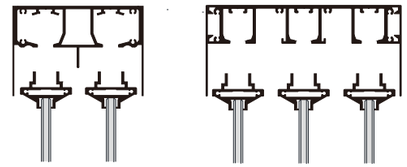

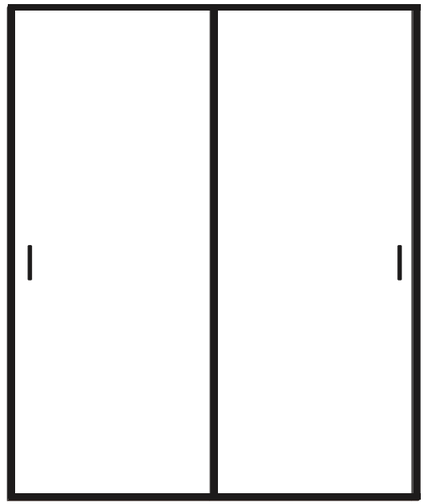

Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics


- Extremely narrow frame, visible surface is only 16mm, landing transparent
- Standard 6mm tempered glass, safe and secure
- Special profile, 2.0mm wall thickness, stable and firm
- Special matching handle, parallel to the border, beautiful and practical
- Classic elegant black, all-match fashion


Video explanation



90 MICRO VENTILATION SYSTEM

Product Section Details

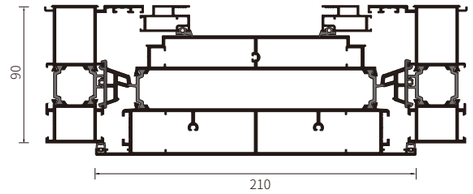

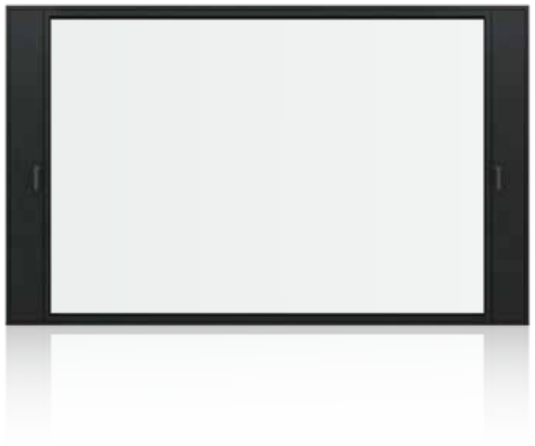

Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★★	★★☆ ★★☆	★★★★ ★★★★★★	★★☆ ★★☆	★★★★☆ ★★★★☆

Product characteristics

- Double-sided ultra-narrow opening fan design, no frame in the middle to block the line of sight, to maximize the lighting area
- The long strip micro-vent design introduces comfortable ventilation into the home and prevents children from climbing the window
- Can make oversized glass


Video explanation

IMAGERY DOOR AND WINDOW SYSTEM

Doors and Windows / Curtain wall / Sunroom / Metal furniture

82 NEW CHINESE DOORS AND WINDOWS SYSTEM

Product Section Details





Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★☆ ★☆☆	★★★★ ★★★★☆	★★☆ ★☆☆	★★★☆☆ ★★★☆☆

Product characteristics


- Ink scroll ancient dream
  Exquisite lattice, perfect composition, every Angle, you can cut a window picturesque.
- And the home of Yazheng hair ornaments
  The antique panes form a unique scenery throughout the building; The ancient rhyme that precipitates the culture of thousands of years has come through thousands of years, and it is still beautiful.
- Inch by inch is a burden
  Precipitation of thousands of years of ancient rhyme, always with a kind of chic beauty, only for Jun Yue.

Video explanation



88 ALUMINUM CLAD WOOD SYSTEM

Product Section Details





Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
★★★★ ★★★☆	★★★ ★★☆	★★★★ ★★★★★	★★★ ★★☆	★★★★☆ ★★★★☆

Product characteristics


- Wood: American imported red oak
- Wood thickness :68mm
- Aluminum clad wood hardware handle: Hoppe aluminum clad wood imported from Germany
- Hardware transmission: Roto hardware imported from Germany
- Glass and insulating strip: own tempered, three glass national standard 5mm tempered safety glass, Zibo Jinjing high permeability original film. Standard hollow one bent black spacer Savorchi warm edge spacer optional
- Sealing system: four system sealing, frame and fan two. The main seal is Jiangyin Haida high fixed integral seamless welding process
- Wood finish: Imported Akzo Nobel waterborne paint

Video explanation



168 INTELLIGENT LIFTING WINDOW SYSTEM

Product Section Details

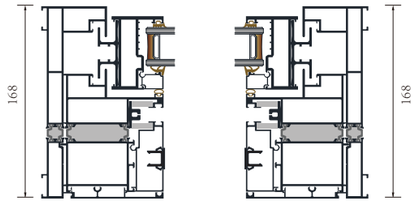



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics

- National standard exclusive profile system
- Intelligent system, can be equipped with electric remote control open
- Infrared anti-pinch hand design, identify obstacles and stop immediately
- Intelligent weather sensing system, it closes automatically when the wind and rain come
- Can be equipped with electric roller screen, ventilation and anti-mosquito

Video explanation



ALUMINUM ELECTRIC BUILT-IN BLINDS WINDOWS

Product Section Details

5+19louver+5

Recommended scenario

Kitchen, bathroom

Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
—	—	—	★★☆ ★★★	★★★☆☆ ★★★☆☆




Product characteristics

- shading
- Blocking privacy
- Louver profiles are aluminum alloy
- Simple and beautiful, easy to clean
- The Angle of the blade can be freely adjusted to control the entry of light
- The main function is to block light and block privacy
- Electric control, convenient, saves both time and labor

Video explanation

ALUMINUM ALLOY FIXED SKYLIGHT

Product Section Details

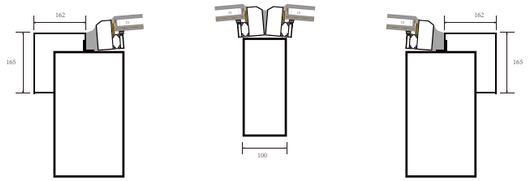



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/


Product characteristics

- Profile: Jinxiang aluminum material, thickness 1.8mm - 2.5mm
- Insulation strip: Nylon PA66, frame and sash 14.8mm, well-known domestic brands Ensinger and Technoformbautec
- Glass: 5mm + 1.14pvb + 5mm + 15A + 8mm low-e laminated tempered glass
- Surface treatment: 10-year weather-resistant powder coating
- Overall welding process for the frame and sash, processed smoothly, no water leakage risk
- Sealant: Domestic well-known brand: Antas
- Applicable scenarios: Sunroom, lighting well, independent skylight opening, etc.



ELECTRIC SKYLIGHT

Product Section Details

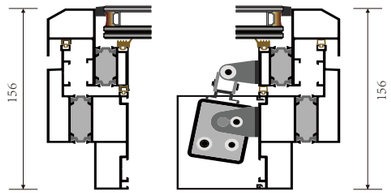



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics

- Main frame profile thickness thickness of 2.0 mm; opening sash available up to a maximum size of 2 ㎡.
- Adopts integrated frame-sash welding technology for a smooth finish and excellent waterproof performance, eliminating water seepage risks.
- Supports dual operation modes: manual and electric opening.
- Standard glass specification: 5+0.76PVB+5+12+5 laminated insulated glass.
- Equipped with optional rain & wind sensors and compatible with whole-house smart control systems.
- Applications: sunrooms, light wells, independent skylight openings, and similar architectural spaces.

Video explanation



AUTOMATIC REMOTE CONTROL ELECTRIC WINDOWS SYSTEM



Applicable occasions

skylights, bedrooms, living rooms,
and other locations that require smart windows

Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics

- Adopts the broken bridge aluminum profile, the profile wall thickness is optional
- Optional Chinese brand and imported brand hardware
- Manual opening, fixed controller opening, remote control, mobile APP opening and so on
- Can be equipped with wind and rain induction device


Video explanation



ALUMINUM ELECTRIC ROLLING SHUTTER

Product Section Details

Skylight, bedroom, living room and other occasions can be used

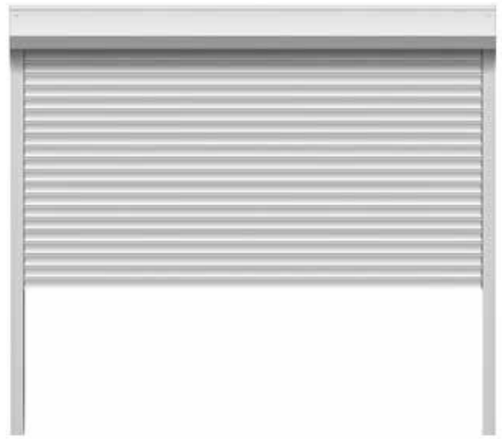

Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics


- Material: Aluminum alloy
- Corrosion resistance and aging resistance
- Opening and closing sound is small, opening and closing feel comfortable
- Can effectively prevent strong light exposure and ultraviolet radiation, suitable for various climate and weather changes

Video explanation

IMAGERY DOOR AND WINDOW SYSTEM

ELECTRICALLY OPERATED FLIP-TOP PAVILION

Product Section Details

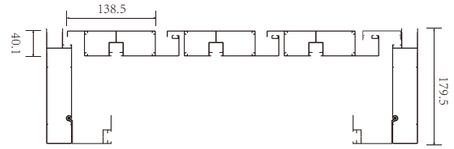



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics

- Electric Windproof Roller Blind: Wind resistance, sun shading and mosquito prevention
- Motorized Tilting Louvers: One-touch control. Louvers can be tilted freely to adjust shading and ventilation.
- Aluminum-Plastic Flooring: Eco-friendly and durable, suitable for all climates
- Aluminum Alloy Material: Sturdy, durable with premium texture
- Recessed Lighting System

Video explanation

ALUMINUM ALLOY GLASS PARTITION

Glass configuration

Can be matched with single-layer or hollow tempered glass, and built-in blinds



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics

- Profile: 6063-T5 aluminum alloy profile
- Double glass partition, can be matched with built-in glass louvers, effectively protect personal privacy
- Wide range of uses: home decoration, commercial places, public places, industrial places, office buildings, production plants, etc



ALUMINUM RAILING/ HANDRAIL/GUARDRAIL BALUSTRADE

Product Section Details

Stairs, balconies, villas, etc



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics

- Aluminum railings Raw materials aluminum can be selected: square, round, oval and so on
- The overall appearance of the railing can be made into vertical bar shape, horizontal bar shape, wavy shape, etc
- Solid and practical
- Long service life: the surface of the aluminum profile is treated with powder spraying, the surface color is rich, the corrosion resistance is strong, the weather resistance is good, and the service life can reach more than 10 years
- Colors can be customized according to customer requirements



ALUMINIUM ALLOY GLASS RAILING

Glass configuration

5+0.76pvb+5Laminated glass
6+0.76pvb+6Laminated glass
8+1.14pvb+8Laminated glass



Recommended scenario

Tropical balcony, bedroom, toilet

Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics

- Durable, beautiful appearance, security and anti-theft, no maintenance and other advantages
- Corrosion resistance, aging resistance, long service life
- Because the glass railing is transparent, especially in commercial places, it can increase the exposure and display rate of the product
- Aluminum alloy glass railing without painting and maintenance, long new not old
- Aluminum alloy profiles using powder spraying treatment, prevent direct light, no fading, no yellowing, no peeling, no cracking, no foaming, no moth



ALUMINUM LOUVER

Product Section Details

Air conditioning units, power distribution rooms, mechanical rooms, bathrooms, etc.



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics

- ◎ Profile: non-thermal broken aluminum profile
- ◎ Profiles using powder spraying, fluorocarbon spraying, electrophoresis, anodic oxidation and other processes
- ◎ Colors can be customized according to customer preference
- ◎ Four main functions: ventilation, rain prevention, heat dissipation, lighting
- ◎ Can be fixed shutter; Open shutter

ALUMINUM GLASS JALOUSIE WINDOWS

Glass configuration

5mm、6mm tempered glass



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics

- Profile: 6063-T5 aluminum alloy profile, wall thickness 1.0mm, 1.6mm
- Can be matched with single 5MM/6MM tempered glass
- The blade position can be adjusted at any time to meet different ventilation needs
- Good lighting, easy maintenance and significant energy saving effect


Video explanation

Doors and Windows / Curtain wall / Sunroom / Metal furniture



SUNROOM SYSTEM


Product Section Details







Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/


Main beam decomposition


Edge beam decomposition


Roman column

Product characteristics


- Multi-cavity profile structure, bearing cavity thickened, thickened, rod and egg lap, assembly installation, can meet the needs of large-span scenes
- Custom corner code assembly, bridge bearing technology, resistance to greater snow load, wind pressure, bearing node can reach 600kg/m weight
- Complete auxiliary system, water system, sealing system, bearing system
- Intelligent system, lighting system, electric skylight system, vacuum glass configuration, electric honeycomb curtain

Video explanation



ALUMINUM WOOD SUNROOM SYSTEM

Product Section Details

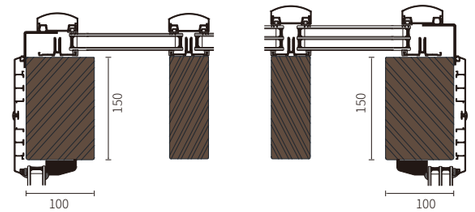



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics


- Imported oak is used in the interior, and the thickness of main beam and auxiliary beam can be adjusted to achieve a large-span scheme. Outdoor with aluminum alloy moisture protection
- Adopts the joint mode of the job and the hidden wooden cable connection, which has high load-bearing strength
- With laminated tempered glass, safe and beautiful
- Independent embedded lighting system LED strip hidden in solid wood
- Intelligent supporting system, can be equipped with electric sunshade electric window opener, easy to operate
- Professional waterproof solution, with gutter drop design, foundation protection board, better drainage performance

Video explanation



WOODEN CABLE CURTAIN WALL SYSTEM

Product Section Details

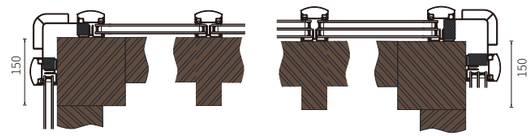



Product performance

Air tightness	Water tightness	Wind pressure resistance	Sound insulation	Insulation property
/	/	/	/	/

Product characteristics

- Wooden cable special connector, can change the column section size, increase the wind pressure strength, suitable for large doors and Windows
- Beam and column using special connecting parts, more firm, precise connection without gap
- Optional glass configuration, three glass two hollow, energy saving effect is more obvious
- Selected imported oak, solid wood interior, metal coat, sunscreen moisture-proof, durable; Solid wood interior, better performance of doors and Windows, sound insulation and noise reduction, water tightness, air tightness is more prominent
- Color selection can be customized, natural solid wood texture, the overall elegant and dignified

Video explanation

SCREEN WINDOW



Ditachable
window screen



Single swing
screen door



Folding Stainless
steel s Mesh Door



Monorail sliding
Stainless steel mesh door





invisible screen





Three-push frame-in-frame screen window





pocket lock screen

Shandong Imagery Doors and Windows Technology Co.,Ltd.

Tel：0539-7826789

Web：www.imagerywindows.com

Add：Bancheng Town, Lanshan District, Linyi City, Shandong Province, China